
Overview

At A Glance

- Integrated WLAN 802.11b¹
- Integrated Bluetooth[™] ¹
- Integrated Keyboard
- Integrated SD expansion slot
- Microsoft [®] Windows[®] Mobile[™] 2003 software for Pocket PC
- Dazzling Transflective TFT color with LED backlight display
- Removable/rechargeable battery
- Stay productive with Pocket versions of familiar applications like Microsoft[®] Outlook[®], Word and Excel

NOTE ¹: A standard WLAN infrastructure, other devices enabled with Bluetooth, and a service contract with a wireless airtime provider may be required for applicable wireless communication. Wireless Internet use requires a separately purchased service contract. Check with a service provider for availability and coverage in your area. Not all web content available.



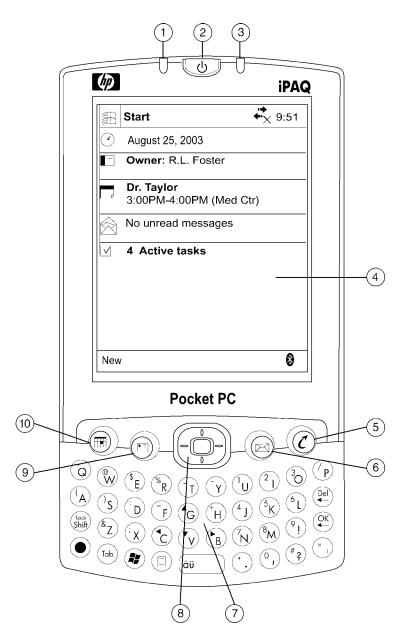

- 1. Active Bluetooth / WLAN Indicator
- 2. Power Button
- 3. LED Battery/Notification Indicator
- 4. Color Display
- 5. iTask Button

- 6. Inbox Button
- 7. Integrated Keyboard
- 8. 5-Way Navigation Button
- 9. Contacts Button
- 10. Calendar Button



Models

iPAQ Pocket PC h 4350 – 64-MB SDRAM FA172A#ABA - US Commercial, English

iPAQ Pocket PC h4355 - 64-MB SDRAM

FA173A#ABA - US Retail, English



| Processor | 400 MHz Intel [®] Xscale [™] tech | nology-based processor | |
|--------------------------------|---|---|--|
| Memory | SDRAM | 64-MB (55-MB user accessible) | |
| · · · · · | | Up to 2.8-MB iPAQ File Store (varies by SKU) | |
| | ROM | 32-MB | |
| Display | Туре | Transflective type TFT color with LED backlight | |
| | Number of Colors | 64K color (65,536 colors) 16-bit | |
| | Touch Screen | Yes | |
| | Resolution (W x H) | 240 x 320 | |
| | Viewable Image Size | 3.5 in (89 mm) | |
| Hardware Buttons/Reset Buttons | One power button, one record one 5-way navigation button | ing button, one soft reset switch, four software programmable application buttons, | |
| Stylus | One (extra stylus included in the box) | | |
| Audio | Integrated microphone, speaker and one 3.5 mm headphone jack, MP3 stereo (through audio jack) | | |
| Notification Systems | Alarms | Solid amber LED (right) – battery in unit fully charged | |
| Notification Systems | Alaillis | Flashing amber LED (right) – battery in unit is charging | |
| | | Flashing green LED (right) - event alarm/notification | |
| | | Flashing green LED (left) – WLAN active | |
| | | Flashing blue LED (left) – Bluetooth active | |
| | Notification | Sound and message on the display | |
| Cradle Interfaces | Connector | 1 | |
| | Cable | 1 USB cable connects to PC | |
| | DC Jack connector for AC Adapter | 1 | |
| | Additional battery charger | Charge additional slim or extended battery | |
| SD Slot | Support SDIO and SD/MMC type standard | | |
| Power Supply | Battery | Removable/Rechargeable 1560 mAh Lithium-lon user swappable battery. Estimated usage time of fully charged battery up to 17 hours (no wireless, no backlight). Optional extended 3600 mAh Lithium-lon battery available for purchase. | |
| | AC Power | AC Input: 100~240 Vac, 50/60 Hz, AC Input current: 0.2 Aac max Output Voltage: 5Vdc (typical), Output Current: 2A (typical) | |
| | NOTE: Battery run time varies based on the usage pattern of an individual user and the configuration of the handheld. Use of internal wireless capabilities and backlight will significantly decrease battery run time. | | |
| Ergonomic Design Features | Integrated, lighted keyboard Instant-on/off and Backlight 5-Way Navigation button Touch-sensitive display for sty 4 programmable application la Record button 2 alarm settings Built-in speaker | rlus unch buttons – defaults configured for Calendar, Contacts, Inbox, and iTask butto | |



| HP Exclusive Applications | Bluetooth Manager iPAQ File Store: non-volatile storage in flash ROM (not available in Japanese, Simplified Chinese, Traditional Chinese and Korean versions) iPAQ Backup: utility for Backup/Restore to Main Memory, Memory Card or iPAQ File Store iPAQ iTask Manager: access and launch programs easily iPAQ Image Zone: view images and create slide shows Utilities: Self Test, iPAQ Audio, Power Status | | | | |
|-------------------------------|---|--|--|--|--|
| Companion CD from HP | APPLICATIONS | | | | |
| | Full Versions | Trial Versions | | | |
| | hp Web registration | Xcellenet Afaria Device Management Agent | | | |
| | hp Mobile Print Center | Margi Presenter-to-Go (requires purchase of additional | | | |
| | Westtek ClearVue Suite | hardware) | | | |
| | F-Secure FileCrypto Data Encryption | Illium ListPro CommonTime Cadenza mNotes | | | |
| | Colligo Personal Edition Adobe PDF Viewer | Resco Picture Viewer – U.S. Retail only | | | |
| | RealOne Player for Pocket PC | , | | | |
| | iPresenter PowerPoint converter | | | | |
| | MobiMate WorldMate | | | | |
| | Resco File Explorer 2003 – U.S. Retail only | | | | |
| | CD LINKS | | | | |
| | NetMotion | | | | |
| | Avaya IP Softphone | | | | |
| | IP Blue VTGO! | | | | |
| | Cisco CallManager | | | | |
| | Pocket Presence Running Voice IP Vindigo | | | | |
| | Audible Manager and Audible Player (Service | plan | | | |
| | required to download and play Audible content | | | | |
| | SingleTap | | | | |
| | Handango | | | | |
| | Pocket Backup Plus | | | | |
| | Additional Documentation | | | | |
| | Safety and Comfort Guide on PDF, and User Guide on PDF | | | | |
| | NOTE : Programs may vary based on SKU. Some programs are accessed through CD links to download web sites. | | | | |
| Operating System | Microsoft® Windows® Mobile™ 2003 Premium | n software for Pocket PC | | | |
| Operating System Applications | Powered by Microsoft [®] Windows [®] Mobile [™] 2003 for Pocket PC Calendar, Contacts, Tasks, Voice Recorder, Notes, Pocket Word (with Spellchecker), Pocket Excel, Pocket Internet Explorer, Windows Media Player 9 (MP3, audio and video streaming), Calculator, Solitaire, Jawbreaker, Inbox (with Spell Checker for email), Microsoft Reader (eBooks), File Explorer, Pictures, Terminal Services Client VPN Client, Infrared Beaming, Clock, Align Screen, Memory, Volume control, ClearType Tuner (except for Asian languages) | | | | |
| Additional Software and links | | top device synchronization), Microsoft Reader eBooks, Links to e applications (some programs may require purchase of additional) | | | |

One-year parts and labor in most regions; 90 days technical support for software in all regions. Optional

CarePAQTM available in North America for Next Business Day replacement (at additional charge)

Service and Support



| Radio Specifications | RF Network Standard | IEEE 802 Part 11b (802.11b) |
|----------------------|-------------------------------|---|
| auto opcomoutions | Frequency Band | 2,4000 to 2.4835 GHz |
| | requested band | 2,4465 to 2.4835 GHz (France) |
| | | 2,4000 to 2,497 GHz (Japan) |
| | Antenna type | Embedded Inverted F Antenna |
| | WEP Security | 64/128-bit compliant to IEEE 802.11 Compliant to 802.1X |
| | Network Architecture Models | Ad-hoc (Peer to Peer) Infrastructure (Access Points Required) |
| | Modulation Technique | Direct Sequence Spread Spectrum |
| | Modulation Schemes | DBPSK, DQPSK, CCK |
| | Receiver Sensitivity - Packet | 11 Mbps: <-80 dBm |
| | Error Rate (8E-2) | 5.5 Mbps: <-82 dBm |
| | | 2 Mbps: <-86 dBm |
| | Maximum Receive Level | 1 Mbps: <-89 dBm -10dBm (1/2/5.5/11 Mbps) |
| | Output Power (approximately) | |
| | Power Management | Radio On/Off control through Microsoft Connection icon, Power Save mode |
| | r ower management | available in Power Settings |
| | Power Consumption | Transfer mode: < 380 mÅ, average |
| | · | Receive mode: < 280 mA, average |
| | Power Saving Option | 802.11 Compliant Power Saving, idle mode 25 mA |
| | Media Access Protocol | CSMA/CA (Collision Avoidance) with ACK |
| | Protocols Supported | TCP/IP IPX/SPX UDP |
| | SAR | 1.0 mW/g |
| | Throughput | >4.5 Mbps |
| | Operating Distance | Up to 1000 feet – Open sight |
| | Certifications | All necessary regulatory approvals for countries we support including: WECA Wi-Fi approval FCC (47 CFR) Part 15C, Section 15.247&15.249 ETS 300 328, ETS 301 489-6 Low Voltage Directive IEC950 |

NOTE: ¹ A standard WLAN infrastructure, other devices enabled with Bluetooth, and a service contract with a wireless airtime provider may be required for applicable wireless communication. Wireless Internet use requires a separately purchased service contract. Check with a service provider for availability and coverage in your area. Not all web content available.



| Bluetooth | Specification | ıs1 |
|-----------|---------------|-----|
|-----------|---------------|-----|

| Technology | High-speed, low-power, short-range | | |
|---|---|--|--|
| Bluetooth specification | 1.1 compliant (2.4-GHz Industrial Scientific Medical Band) | | |
| System interface | High-speed UART processor interface | | |
| User Interface | Bluetooth Manager | | |
| Device type | Class II device; up to 4 dBm transmit, typical 10 meter range | | |
| Power | $3.3\text{V} \pm 5\%$ Peak current - typical TX current at approximately 30 mA | | |
| | - typical RX current at approximately 50 mA | | |
| Receiver sensitivity | -78 dBm | | |
| Regulatory standards | R&TT#-EN 300 328 and EN 300 826, UL 1950, CB Safety Scheme inclusive of EN 60950 and IEC 950, FCC Part 15 subpart C, Canadian, CE, | | |
| Profile Support | General Access Profile Service Discovery Application Profile Serial Port Profile Generic Object Exchange Profile File Transfer Profile Dial-Up Networking Profile LAN Access Profile Object Push Profile Personal Area Networking Profile Basic Printing Profile Hard Copy Replacement Profile (printing) | | |
| Usage Models | Service Discovery Determine what Bluetooth devices are within range and support authorization | | |
| | File Transfer File and directory browsing and navigation on another Bluetooth device. File copying Object manipulation – including add, delete, create new folders etc. | | |
| | Serial Port Synchronization between PDAs and PCs | | |
| | Dial Up Networking Wireless link to WAN thru Bluetooth enabled cell phone* Agnostic to WAN technology Send/receive SMS messages | | |
| | LAN Access Wireless link to Corporate LAN using Bluetooth and appropriate Bluetooth access point* Corporate email, network neighborhood, access to LAN applications, file transfer, ftp, Internet browsing, etc, using TCP/IP* Access the Internet by connecting to your desktop or notebook over Bluetooth and using its network connection* | | |
| Generic Object Exchange and Object Push Exchange business cards, tasks, documents, appointments and more* | | | |
| | Personal Area Networking Collaborate, chat, play games, exchange data* Adhoc peer to peer networking* | | |
| | Basic Printing and Hard Copy Replacement Profiles Print to any HP Bluetooth enabled printer without the need for cables or specific print drivers | | |
| Certifications | All necessary regulatory approvals for countries we support including: Bluetooth logo (FCC (47 CFR) Part 15C, Section 15.247&15.249 ETS 300 328, | | |
| | ETS 301 489-1/17 Low Voltage Directive IEC950 UL and CE Mark | | |

NOTE: ¹A standard WLAN infrastructure, other devices enabled with Bluetooth, and a service contract with a wireless airtime provider may be required for applicable wireless communication. Wireless Internet use requires a separately purchased service contract. Check with a service provider for availability and coverage in your area. Not all web content available.



Technical Specifications

| System Unit | Dimensions (H x W x D) | 5.4 in x 2.9 in x 0.6 in (138.7 mm x 74.6 mm x 14.5 mm) | | |
|-------------------|---------------------------|--|-----------------------------|--|
| | Weight | 5.8 oz (165 g) 32° to 104° F (0° to 40° C) -4° to 140° F (-20° to 60° C) 90% RH | | |
| | Operating Temperature | | | |
| | Storage Temperature | | | |
| | Operating Humidity | | | |
| | Regulatory Marks | Electrical | FCC Class B, UL or CSA NRTL | |
| | | Safety | C-UL, NOM | |
| TFT Color Display | Number of Colors | 65,536 (64K 16-bit) | | |
| | Resolution (W x H) | 240 x 320 | | |
| | Dot Pitch | 0.24 mm | | |
| | Viewable Image | 3.5 in. / 89 mm | | |
| | Display Type | 64K color (16-bit) transflective type TFT color with LED | | |
| AC Adapter | Dimensions (H x W x D) | 3 x 1.9 x 1.8 in (76 x 48 | x 44 mm) (including prongs) | |
| | Cord Length (approximate) | 6 ft (1.83 m) | | |
| | Power Supply Ratings | Voltage Range | 100 to 240 V Switching | |
| | | Input Current | 0.3 A | |
| | | Input Frequency | 50 to 60 Hz | |
| | | Output Voltage | 5 VDC | |
| | | Output Current | 2 Amp | |



Options

| NOTE : Optional | l accessories are | available at | additional cost. |
|------------------------|-------------------|--------------|------------------|
|------------------------|-------------------|--------------|------------------|

| Memory/Storage | 64-MB SD Memory Card | 253478-B21 | FA134A#AC3 |
|-----------------|---|------------|------------|
| | 128-MB SD Memory Card | 253479-B21 | FA135A#AC3 |
| | 256-MB SD Memory Card | 287464-B21 | FA136A#AC3 |
| | 512-MB SD Memory Card | 344310-B21 | FA184A#AC3 |
| Power | 3600 mAH Lithium Ion Extended Battery | 343118-001 | FA190A#AC3 |
| | 1560 mAh Lithium Ion Slim Battery | 343117-001 | FA189A#AC3 |
| | Auto Adapter | 253508-B21 | FA125A#AC3 |
| | Charger Adapter | 274707-B21 | FA133A#AC3 |
| | AC Adapter | | |
| | U.S., Canada, Latin America, Japan, Taiwan | 253629-001 | FA130A#ABA |
| Synchronization | Desktop Cradle | 343116-001 | FA188A#AC3 |
| | USB Charger/Sync Cable | | FA122A#AC3 |
| Other | Stylus Three-pack | 331311-B21 | FA113#AC3 |
| Performance | SDIO Camera (Photosmart Mobile Camera) | | FA185A#AC3 |
| | iPAQ Navigation System – (U.S. only) | | FA196A#AC3 |
| Cases | Custom Cases: to view and order go to: http://www.casesonline.c | com | |



HP iPAQ Pocket PC is a Microsoft® Windows® Powered Pocket PC

For more information on HP iPAQ Pocket PC, visit our website at http://www.hp.com/go/iPAQ

©Copyright 2003 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows, the Windows Logo and ActiveSync are registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Intel is a registered trademark of Intel Corporation in the U.S. and/or other countries.

